


Huawei AirEngine 5761-12 Access Point Switching it to Cloud Management Mode, and Locating Endpoint Serial Number



Abans


Access the AP (Web Interface)

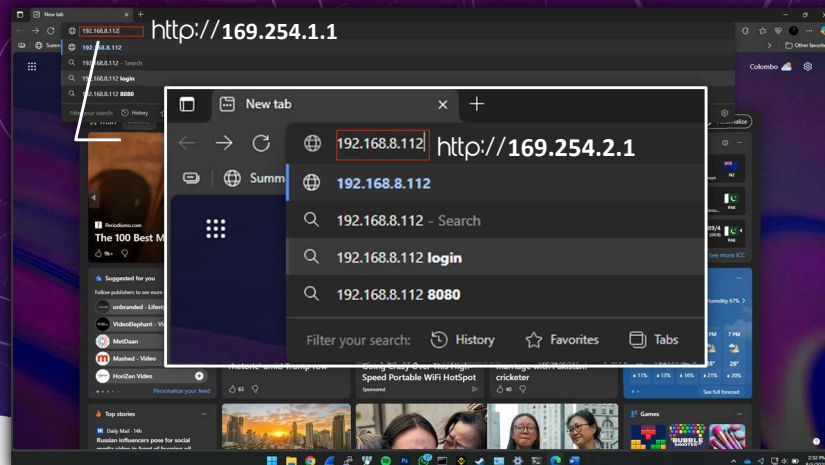

Connect your PC to the AP via Ethernet or wirelessly
Open a browser and go to **http://169.254.2.1**.



Abans

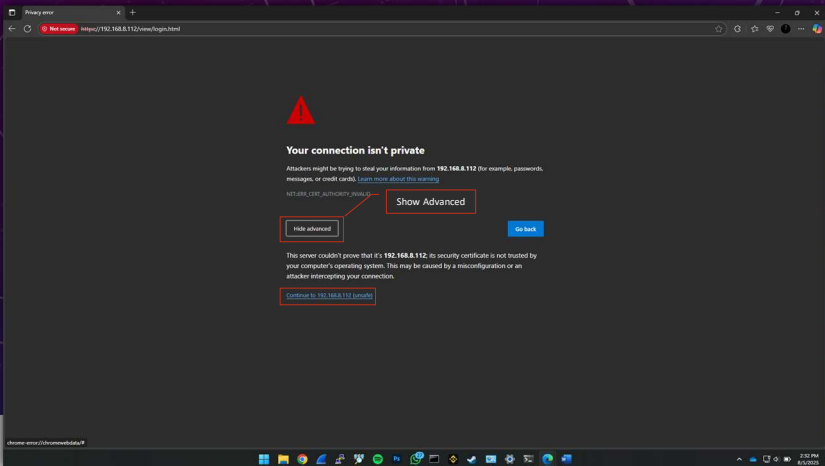

Your connection isn't private

Attackers might be trying to steal your information from 192.168.8.112 (for example: passwords, messages, or credit cards). [Learn more about this warning](#)

NET::ERR_CERT_AUTHORITY_INVALID

Show Advanced

Hide advanced

Go back


This server couldn't prove that it's 192.168.8.112, so security certificate is not trusted by your computer's operating system. This may be caused by a misconfiguration or an attacker intercepting your connection.

Continue to 192.168.8.112 anyway

Abans

HUAWEI STC State Trading (General) Corporation Limited

අපරාධ විමර්ශන
සංවිධාන
අනුකූල
MINISTRY OF EDUCATION

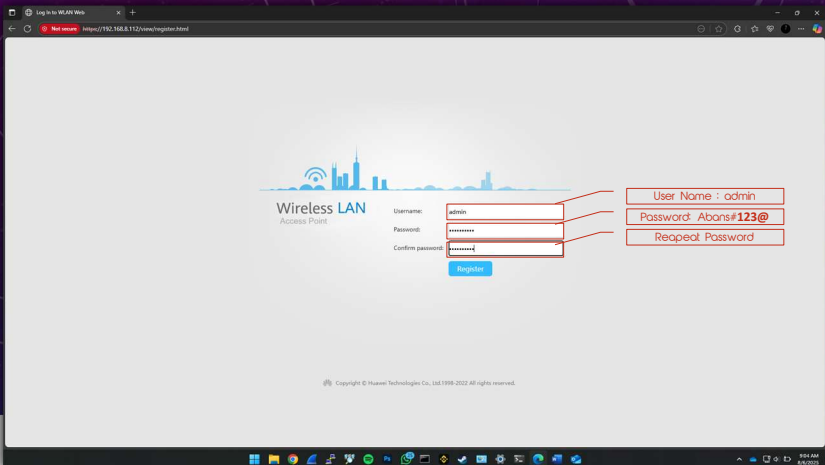

Wireless LAN
Access Point

Username: admin

Password: Abans#123@

Confirm password: Abans#123@

Register

User Name : admin

Password: Abans#123@

Repeat Password


Copyright © Huawei Technologies Co., Ltd. 1998-2012 All rights reserved.

Abans


HUAWEI STC State Trading (General) Corporation Limited

අපරාධ විමර්ශන
සංවිධාන
අනුකූල
MINISTRY OF EDUCATION

Switch to Cloud Management Mode

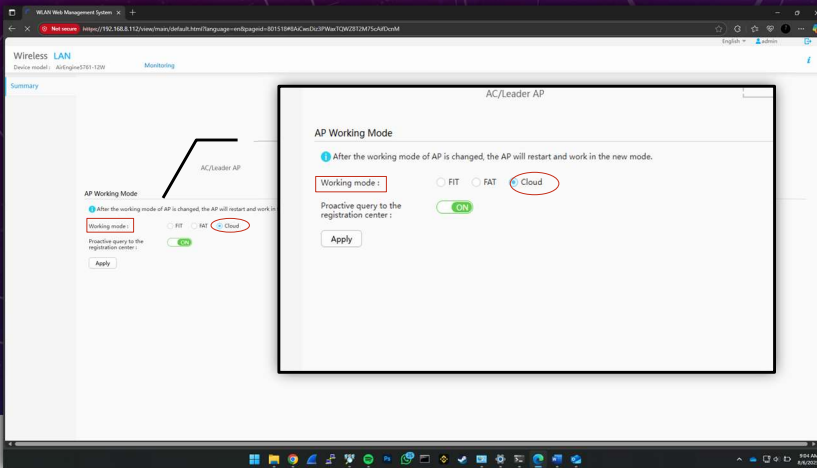


enter 'Summary' to access config mode. Change the Working mode to "Cloud". After apply.

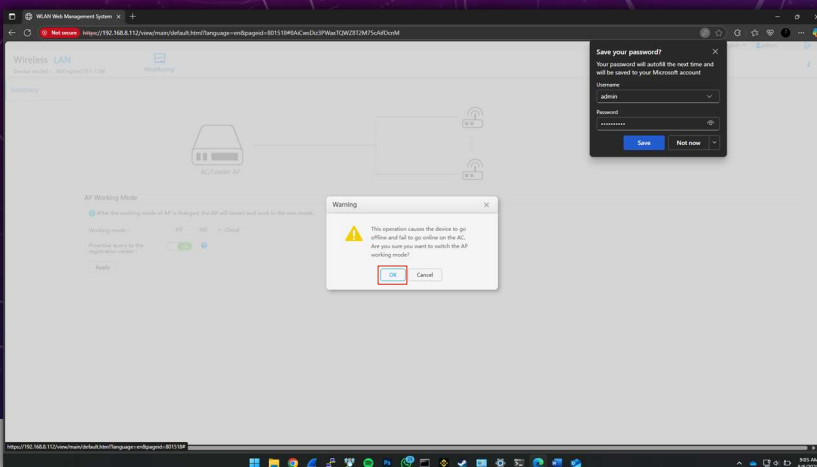


Confirm the warning (OK) - the AP will reboot (~2 minutes) and start in cloud mode.


Configuration Cloud Management Mode

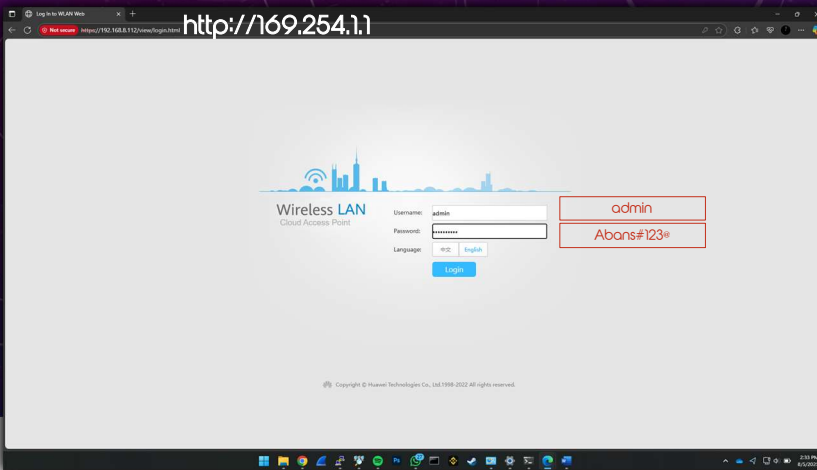

After reboot, Open a browser and go to **http://169.254.1.1** verify with 'display version' (shows 'CLOUD' in output). The AP will now attempt to connect to Huawei's cloud platform ensure. Log in with same Username and password.

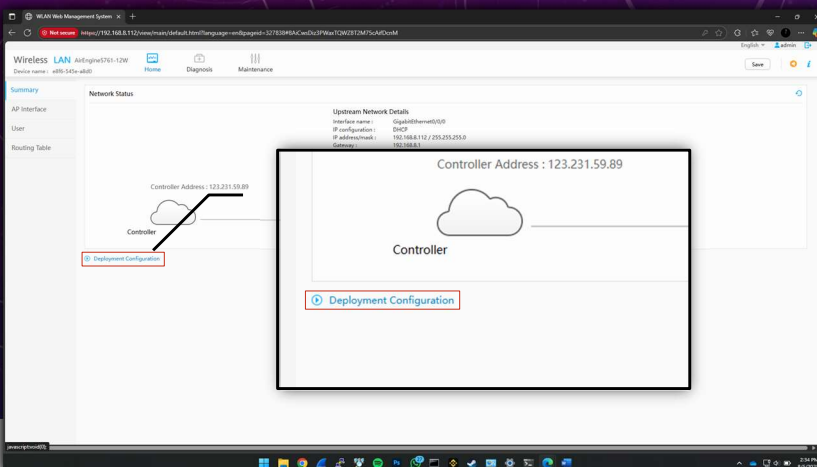


On the Summary page, click **Deployment Configuration**. On the Deployment Configuration page that is displayed, configure a cloud AP.

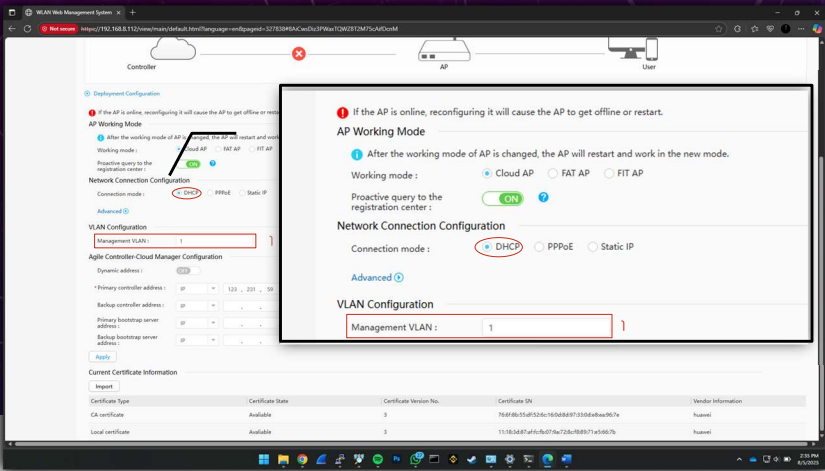

Set Connection Mode to DHCP (default may be DHCP). This enables manual IP configuration for the management VLANIF (1) interface.

HUAWEI **STC** **State Trading (General) Corporation Limited** **අපනයන හා අලෙවි කිරීමේ අමාත්‍යාංශය** **MINISTRY OF EDUCATION**


Abans

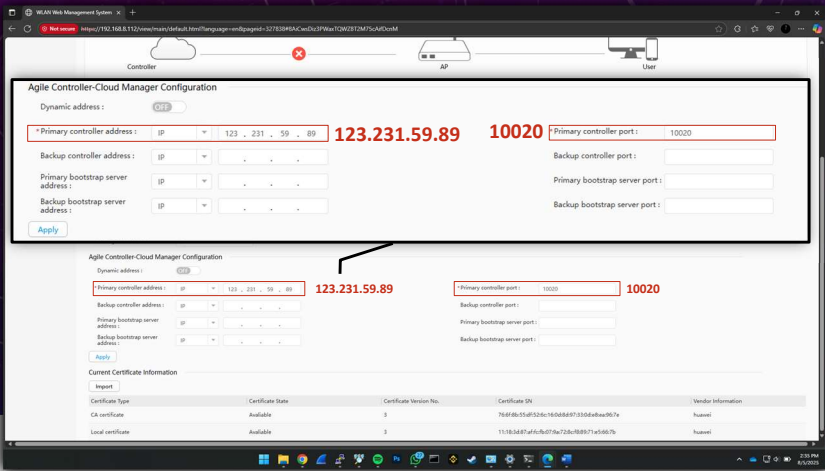

Enter the desired 'Primary Controller Address' :123.231.59.89, and enter port number "Primary Controller Port" : 10020

HUAWEI **STC** **State Trading (General) Corporation Limited** **අපනයන හා අලෙවි කිරීමේ අමාත්‍යාංශය** **MINISTRY OF EDUCATION**


Abans

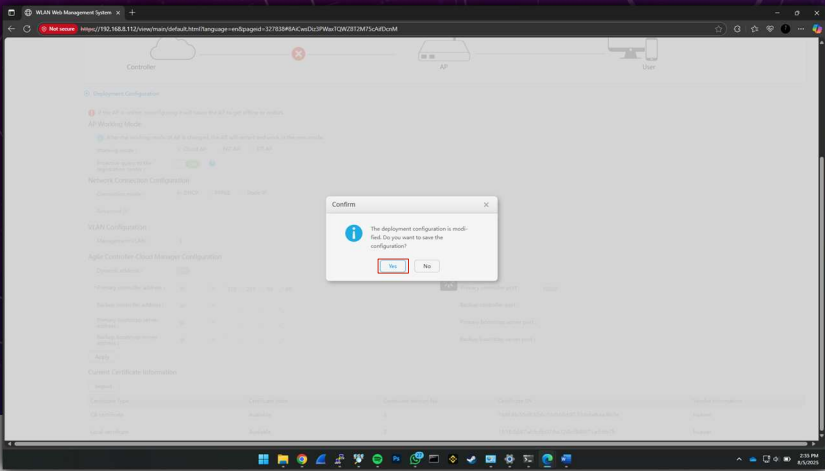

Click Apply or Save.
the AP may restart.

HUAWEI STC Sri Lanka State Trading (General) Corporation Limited අපරාධ විමර්ශන කොමිෂන් ආයතන අමාත්‍යාංශය MINISTRY OF EDUCATION

Abans

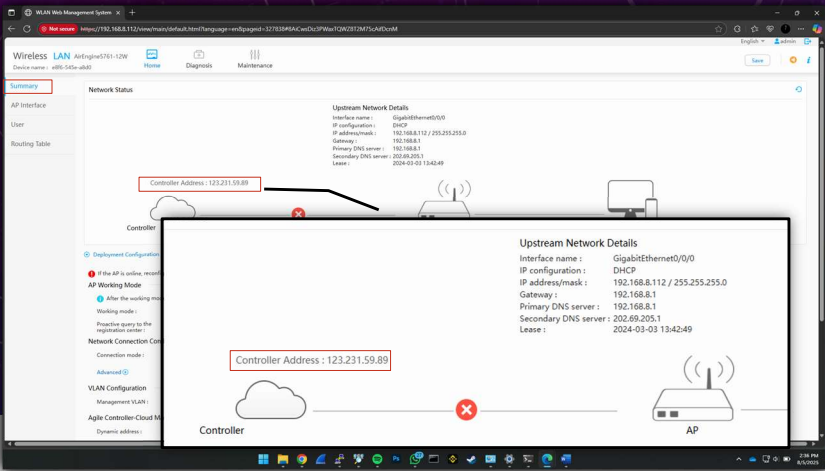


log in again after
Check Monitoring >
Summary to confirm
the IP is active.
"Controller Address :
123.231.59.89"


HUAWEI STC Sri Lanka State Trading (General) Corporation Limited අපරාධ විමර්ශන කොමිෂන් ආයතන අමාත්‍යාංශය MINISTRY OF EDUCATION

Abans

Locate the ESN/Serial Number

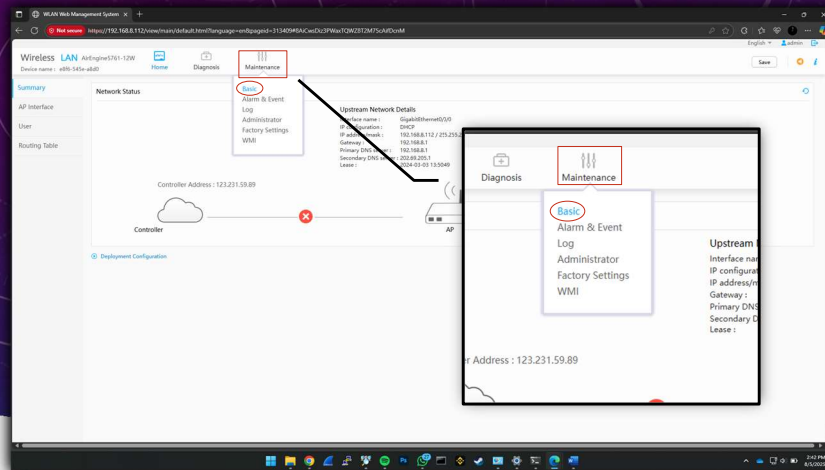

From the dashboard, go to 'Maintenance'. Select the Maintenance from the list. Click 'Basic'.

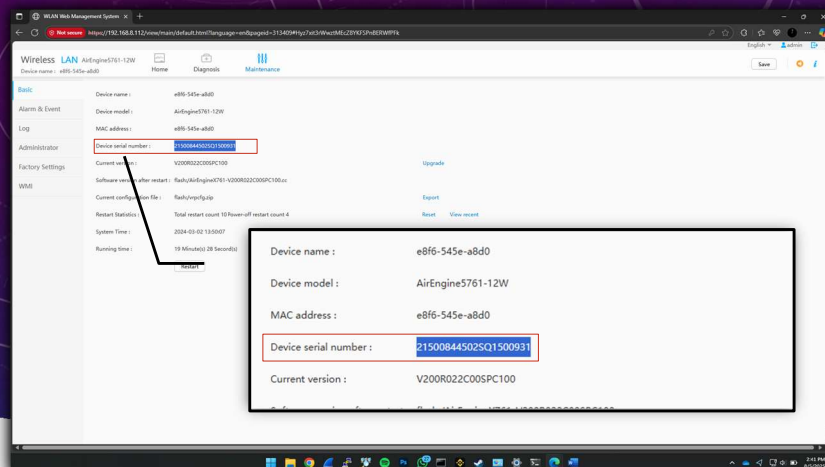

The ESN/SN will be displayed in the Basic section.

After obtaining the serial number (SN), please contact the designated support line and provide the SN to ensure it is registered on the SMC server.

- 0112 784910
- 0112 784336

